




*Are you still using
the conventional
small digger?*

and


**MICRON
TURBO 20
DIESEL**

*Introducing
the*

**FLEMING
MICRON^{GX}**

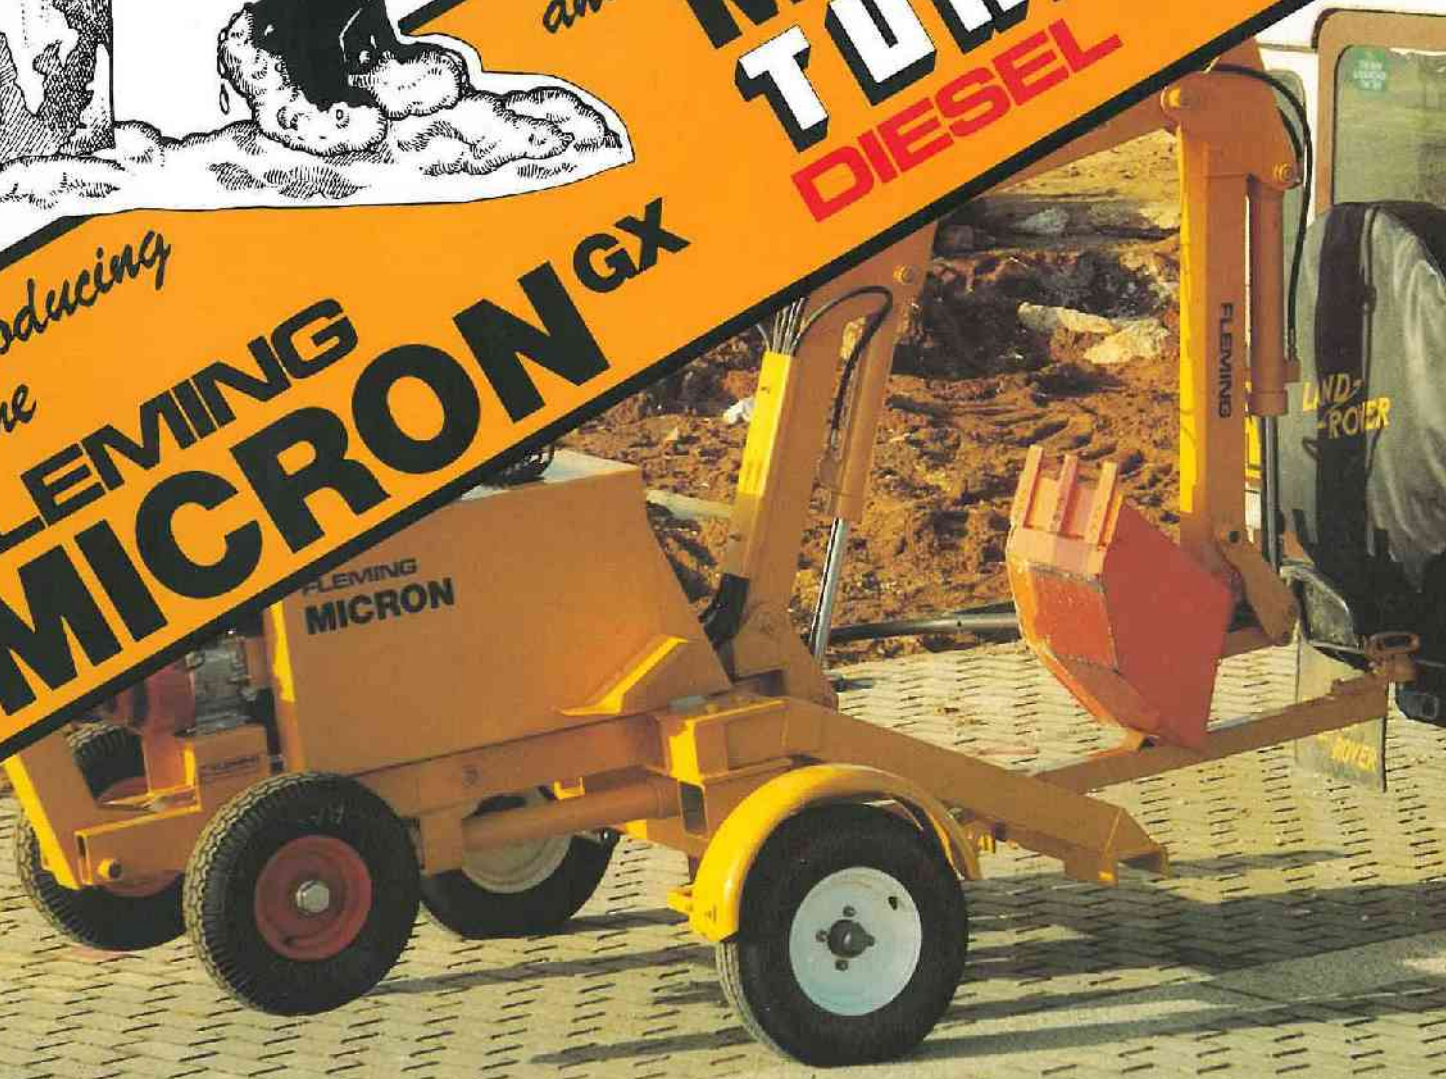

FLEMING AHEAD BY DESIGN

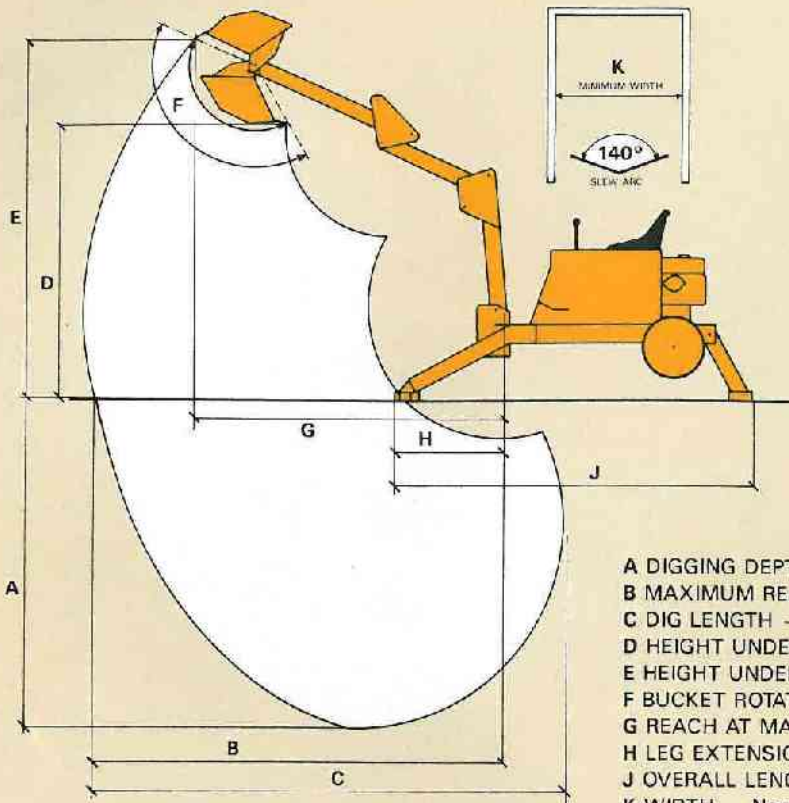

- A DIGGING DEPTH — 2.03m
- B MAXIMUM REACH — 2.75m
- C DIG LENGTH — 3.20m
- D HEIGHT UNDER BUCKET CROWDED — 1.70m
- E HEIGHT UNDER BUCKET DUMPED — 2.30m
- F BUCKET ROTATION — 160°
- G REACH AT MAXIMUM HEIGHT — 2.14m
- H LEG EXTENSION — Narrow 0.76m; Wide 0.58m
- J OVERALL LENGTH — Narrow 2.47m; Wide 2.24m
- K WIDTH — Narrow 0.70m; Wide 2.05m

I.S.O. Control Layout



SPECIFICATIONS:

Weight inc 200mm bucket:

Trailer weight:

Engine — Petrol:

Engine — Diesel:

Pump Flow Rate:

Oil Cooling:

Oil Capacity:

Hydraulic Valve:

Hydraulic Rams:

Filtration:

Chassis:

Front Legs:

Axle:

Arms:

Pivots:

Pins:

Buckets:

Accessories:

Options:

MICRON GX

440 kg	490 kg
76 kg	76 kg
5HP/4 stroke HONDA GX140	10HP/4 stroke HONDA G400
4 stroke HATZ E673 LHK	4 stroke HATZ ES79
14 L.P.M.	22 L.P.M.
Radiated	Forced air 16 row matrix

MICRON TURBO 20

22 Litres

2+1 lever 5 function with full overload protection

60mm Bore x 330mm Stroke

Suction line to 10 micron

Twin rail with hydraulic lateral leg ram

9 Position adjustable

4 Position adjustable

Fabricated structural steel, stress relieved

Filled Nylatron replaceable/hardened steel spring tension bushes

Greaseable/high carbon steel/plated

200, 300, 400, 600mm Excavator with bolt-on teeth

Range of Buckets, Backfill Blade, Side Cutters, Deep Sprags, Handling Trolley, Trailer, Weather Frame, Height Adjustable Legs, Engine Security Cover

Petrol or Diesel Engine, 2 Stroke Engine, Electric Motor, Truck Mounting, Tropicalisation, Electric Start

Fleming policy is one of continuous improvement, and the right to change prices and specifications of equipment is reserved.

For further information or demonstration please contact:

FLEMING
Fleming International Machinery Ltd.

COSGROVE ROAD, OLD STRATFORD, MILTON KEYNES MK19 6AG
ENGLAND TEL. MILTON KEYNES (0908) 563247

Local Distributor: